


Pop-Top Roof – User Manual.


Opening:



1. **Open at least two doors of the vehicle and keep them open** until the roof is fully raised.
2. Remove the roof trim/entry cover above the heads of the driver and front passenger.

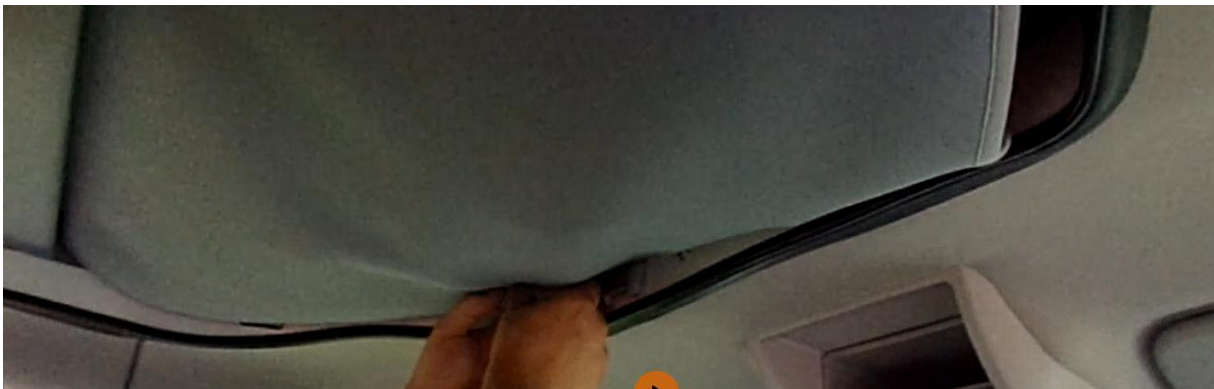

3. Undo the butterfly latches (A) on both sides of the vehicle, then release the safety straps (B).

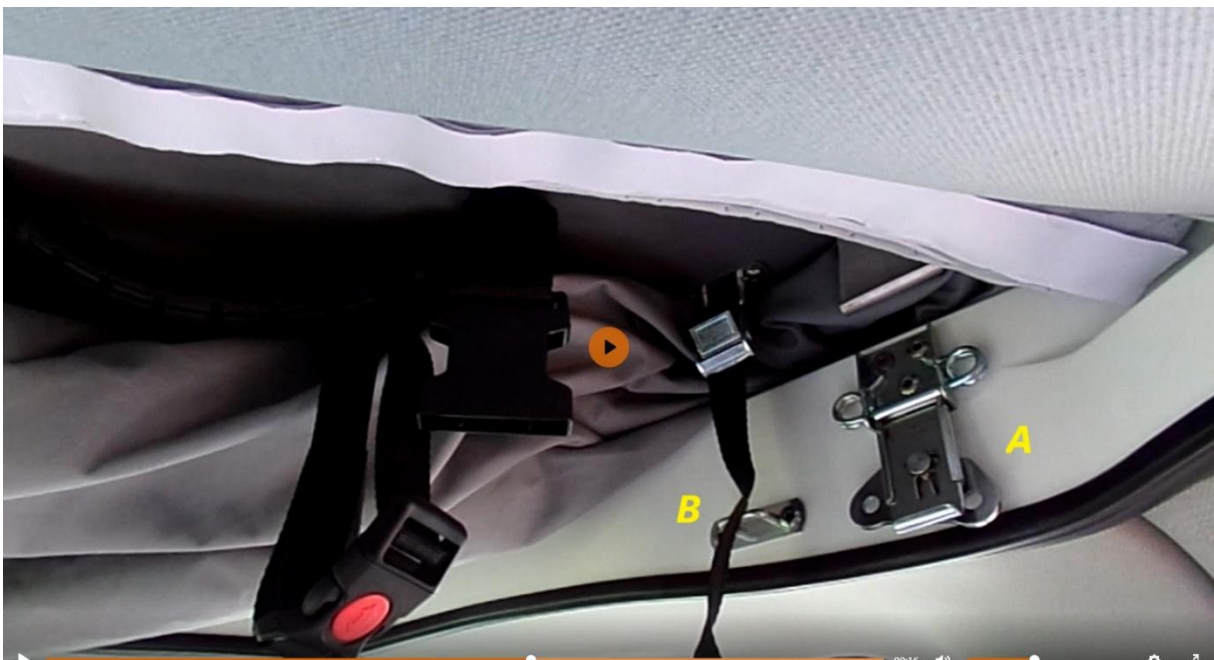

4. Lift the roof evenly upwards using both hands. Avoid tilting.



5. The roof is now open.





Closing:



1. **Open at least two doors of the vehicle and keep them open** until the roof is fully closed.
2. Close all fasteners on the mosquito net and tent. Grip both pull loops evenly and pull them downward. Avoid tilting the roof.




3. While lowering the roof, tuck in the tent fabric from both side walls.




4. Lower the roof into its final position. Ensure that it lies flat against the vehicle roof on all sides. If necessary, adjust the tent fabric at the front of the vehicle so that it is evenly folded without unnecessary creases or bulges.




5. Remove the roof trim/entry cover and place it aside.

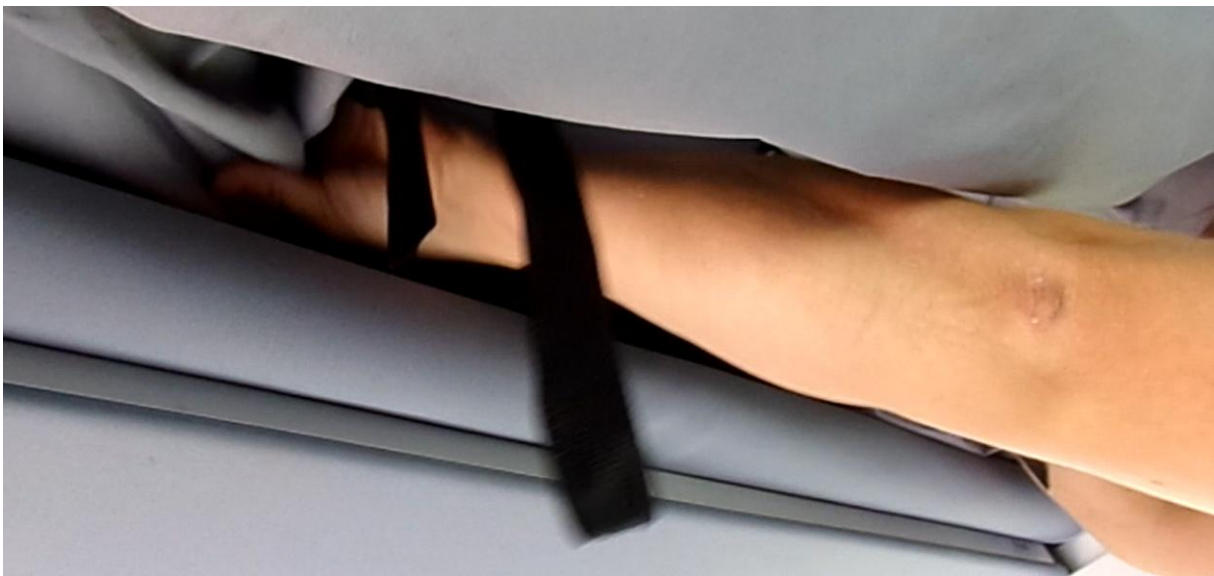

6. First fasten the safety straps (B), then close the butterfly latches (A) on both sides.

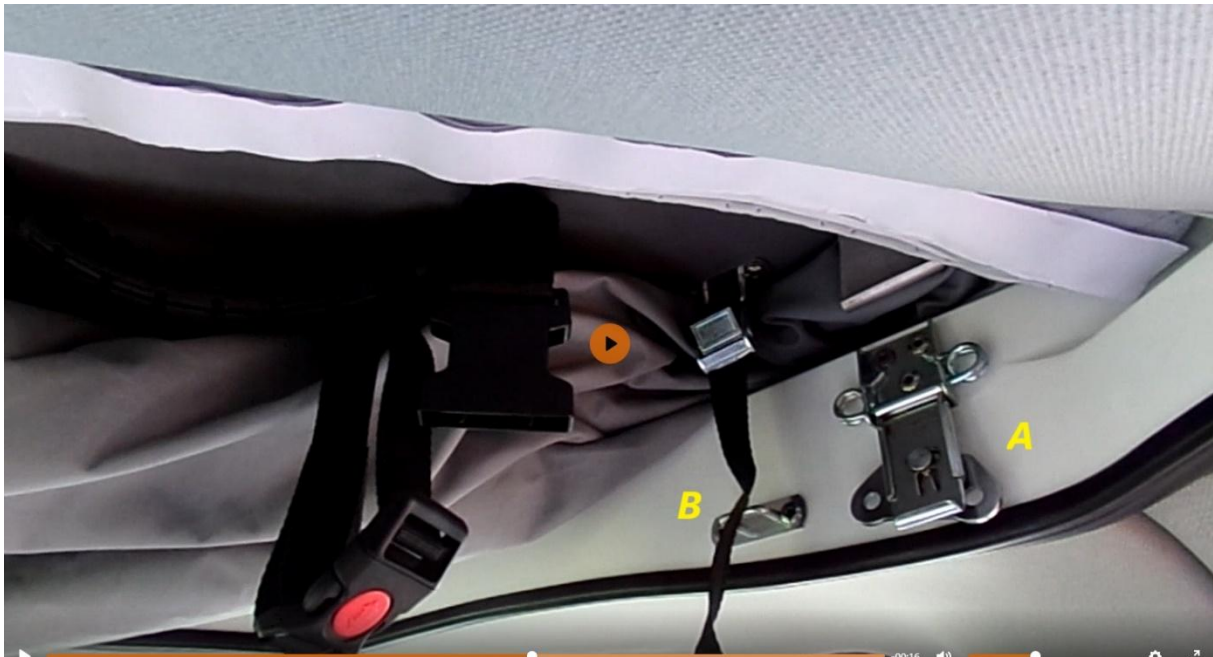

7. Reattach the roof trim/entry cover.

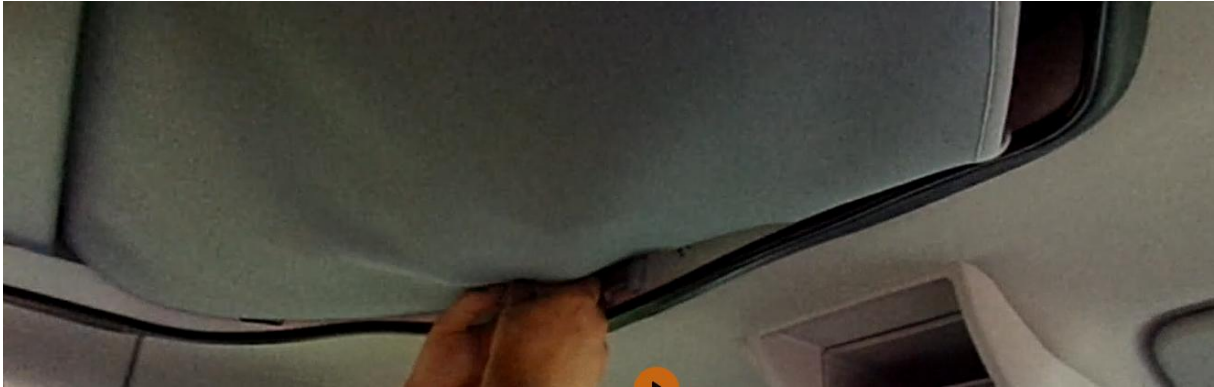

8. Check that the roof is properly closed.



Maintenance and Care Instructions

1. Care of the GFRP Roof Shell (glass fiber reinforced plastic)

Care should follow the paint care instructions of the respective vehicle manufacturer. Standard car care products can be used.

In addition to regular vehicle washing, we recommend treating the roof at least twice a year with the following care products from Certiman:

- Paint Cleaner
- Paint Polish
- Paint Sealant

These products are available at camping, boating, and caravan specialty retailers.

2. Care of the Foam Velour Interior Lining

Dirt on the velour can be removed with a clean, damp cloth or a clean brush.

3. Care of the Sleeping and Pop-Top Roofs

- The bellows fabric should be treated with a standard waterproofing spray before the season starts and ventilated several times a year to prevent mildew odors.
- The roof must not be closed with damp or wet tent fabric. If this does occur, it should be thoroughly dried as soon as possible.
- Always follow the instructions when closing the roof!
- The sealing rubber on the roof shell should be treated with talcum powder or a similar product before the winter months to prevent the seal from freezing to the vehicle body in cold weather.